| Τεχνικά Στοιχεία / Technical Data<br>Veti teknike / Технички карактеристики | | ERGO Block 40 | ERGO Block 60 |
|---|---|---|---|
| Χωρητικότητα αναμικτήρα / Nxënësia e përzierësit<br>Mixer capacity / Капацитет на миксер | ($m^3$)<br>($m^3$) | 1.00 - 1.50 | 2.00 - 2.50 |
| Πραγματική παραγωγή / Prodhim real<br>Actual production / Реална продуктивност | ($m^3$/h)<br>($m^3$/h) | 40 - 50 | 60 - 80 |
| Τύπος αναμικτήρα<br>Mixer typ<br>Tipi i përzierësit<br>Вид на миксер | | Διπλού οριζοντιου άξονα<br>Twin horizontal shaft<br>bosht horizontal binjak<br>двојно хоризонт. оска | Διπλού οριζοντιου άξονα<br>Twin horizontal shaft<br>bosht horizontal binjak<br>двојно хоризонт. оска |
| Αποθήκες αδρανών υλικών<br>Aggregates compartments<br>Magazina të lëndëve të ngurta<br>Складирање на агрегати | | 3 - 4 | 3 - 4 |
| Χωρητικότητα αδρανών υλικών<br>Aggregates compartments capacity<br>Nxënësia e lëndëve të ngurta<br>Капацитет на агрегати | ($m^3$)<br>($m^3$)<br>($m^3$)<br>($m^3$) | 24 - 32 | 36 - 48 |
| Κεντρική μεταφορική ταινία (Π x Μ)<br>Central conveyor belt (W x L)<br>Shirit qendror transmisioni<br>Главна транспортна лента | (mm)<br>(mm)<br>(mm)<br>(mm) | 650 x 6500 | 800 x 6500 |
| Ζυγοταινία (Π x Μ)<br>Weighting conveyor belt (W x L)<br>Shirit peshimi<br>Лента за мерење | (mm)<br>(mm)<br>(mm)<br>(mm) | 1 x<br>650 x 4500 | 1 x<br>650 x 4500 |
| Ζυγός τσιμέντου / Cement scale<br>Peshore çimentoje / Мерење на цемент | (lt)<br>(lt) | 600 | 900 |
| Ζυγός νερού / Water scale<br>Peshore e ujit / Мерење на вода | (lt)<br>(lt) | 450 | 750 |
| Ζυγός χημικών / Additives scale<br>Peshore e lendeve kimike / Мерење на хемикалии | (lt)<br>(lt) | 2 x 22 | 2 x 22 |
| Κοχλίας μεταφορας τσιμέντου (διαστάσεις)<br>Cement screw conveyor (dimensions)<br>Spiral transmisioni i çimentos (përmasa)<br>Завртка за транспорт на цемент (Димензии) | (mm)<br>(mm)<br>(mm)<br>(mm) | 1 - 2<br>Ø219 x 12000 | 2 - 3<br>Ø273 x 12000 |
| Σιλό τσιμέντου (προαιρετικά) / Silo çimentoje<br>Cement silo (optional) / Силос за цемент | | 1 - 2 | 2 - 3 |
| Εγκατεστημένη ισχύς / Fuqi e instaluar<br>Installed power / Инсталирана моќ | (Kw)<br>(Kw) | 90 | 130 |
| Πιστοποίηση / Certification / Certifikim / Сертифицирање | | Έγκριση τύπου CE / CE Certificate<br>Miratim i tipit CE / Сертификат тип CE | |

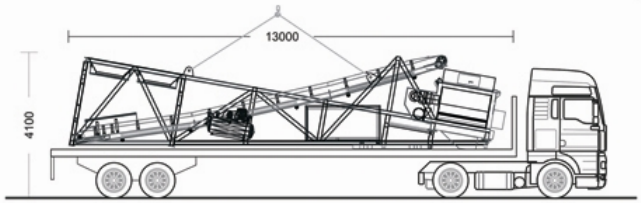


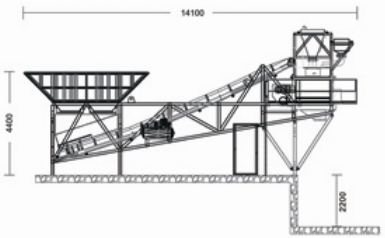



Thessaloniki - Greece - Greqi
tel: +30 2310 755 318
fax: +30 2310 759 776
mob: +30 6984 20 15 15
e-mail: info@stefasergon.gr
stefas.ergon@gmail.com

Tripoli - Libya
tel: +218 92 30 26520

www.stefasergon.gr
www.stefasmc.ro

Bucharest - Romania
tel: +40 21 332 60 52
fax: +40 21 332 60 51
mob: +40 75 709 54 41
e-mail: info@stefasmc.ro
stefasmc@gmail.com


# ERGOBlock

Komplekse të betonit - Gurore
Композиции на машини за производство на бетон - Каменоломи

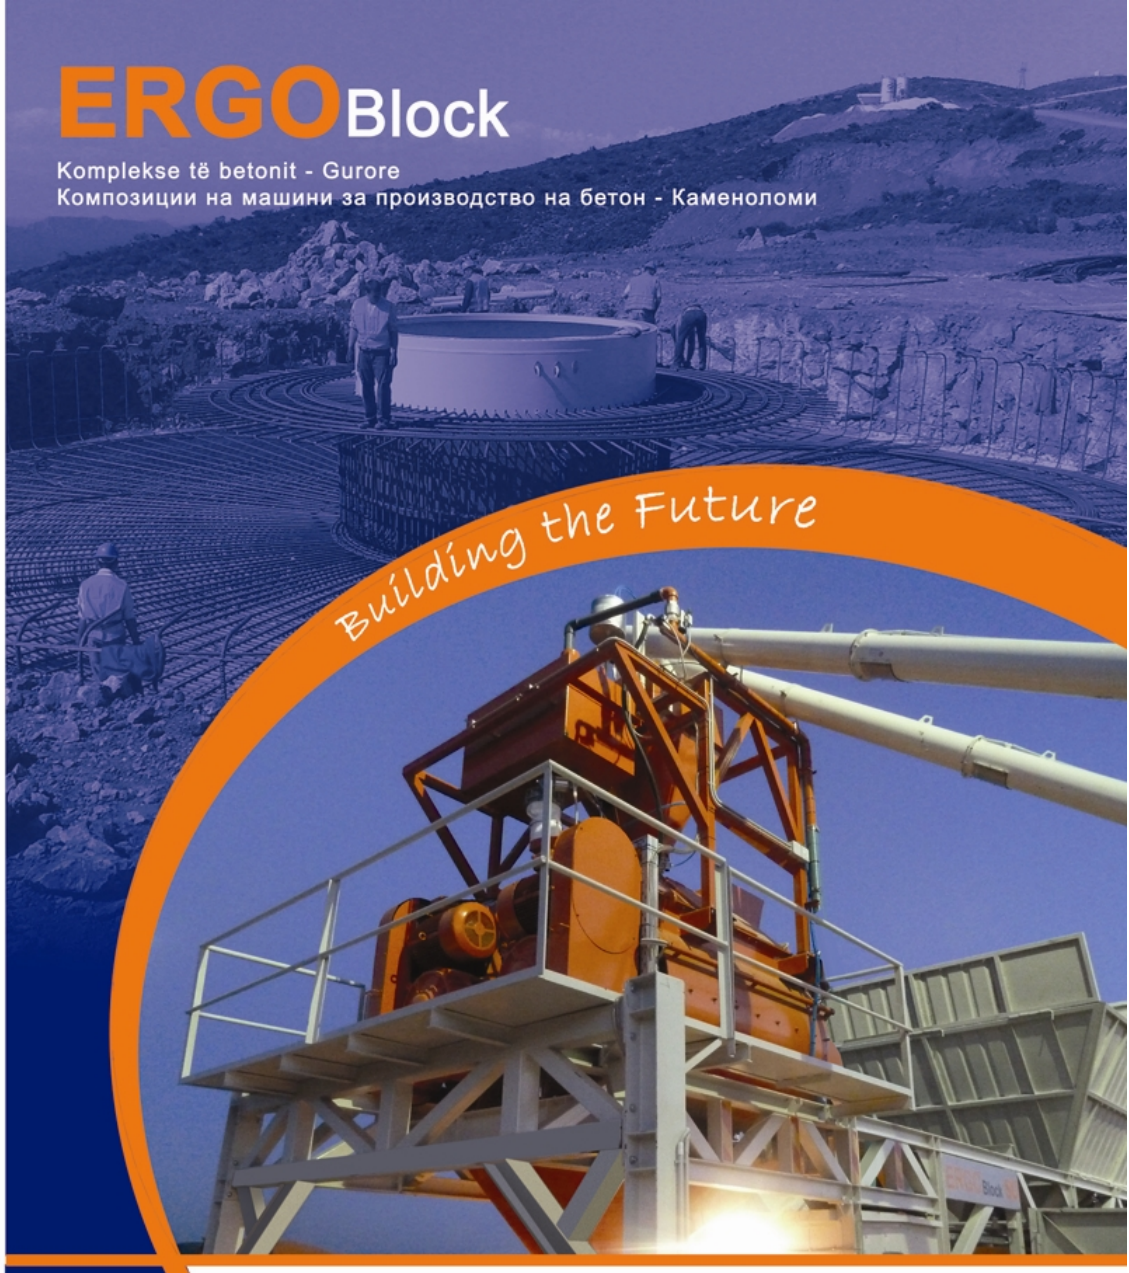


Stefasergon
construction machinery

# Stefasergon
construction machinery

# ERGO Block 60

Mixer
Përzierës i betonit
Мешалка на бетон

Mixer tower
Kulla e përzierjes
Кула каде што се врши мешање

STEFAS ERGON has recently added to their full range of concrete batching plants, a line of smaller and economically mobile plants for the reduction of cost and to satisfy the client's needs.

The new mobile plants, series ERGO BLOCK 40 and ERGO BLOCK 60, are designed for easy transport -special vehicles are not required- ,easy installation and does not require foundations.

ERGOBLOCK mobile plants are ideal for install on job /project sites.
The main advantages are the low cost, the ergonomic design, easy installation and immediate production of concrete within couple of hours.

Mixer
Përzierës i betonit
Мешалка на бетон

Cement screw conveyors
Spirali i çimentos
Завртка за цемент